



THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF VTE INCORPORATED. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF VTE INCORPORATED IS PROHIBITED. VTE MAKES NO WARRANTY, EXPRESSED OR IMPLIED, AS TO THE SUITABILITY OF A PRODUCT FOR ANY INTENDED USE. THE CUSTOMER SHALL BEAR THE SOLE RESPONSIBILITY OF DETERMINING THE SUITABILITY OF ANY VTE PRODUCT FOR ITS END USE.

LTR	REVISIONS	DATE	INT.
✓	SEAL WALL THICKNESS REVISED TO .0075"	11-04-19	EJE
B	UPDATED MATERIAL INFORMATION	8-02-22	RAS
C	REMOVED TYP. WALL THICKNESS* NOTE	10-24-22	RAS

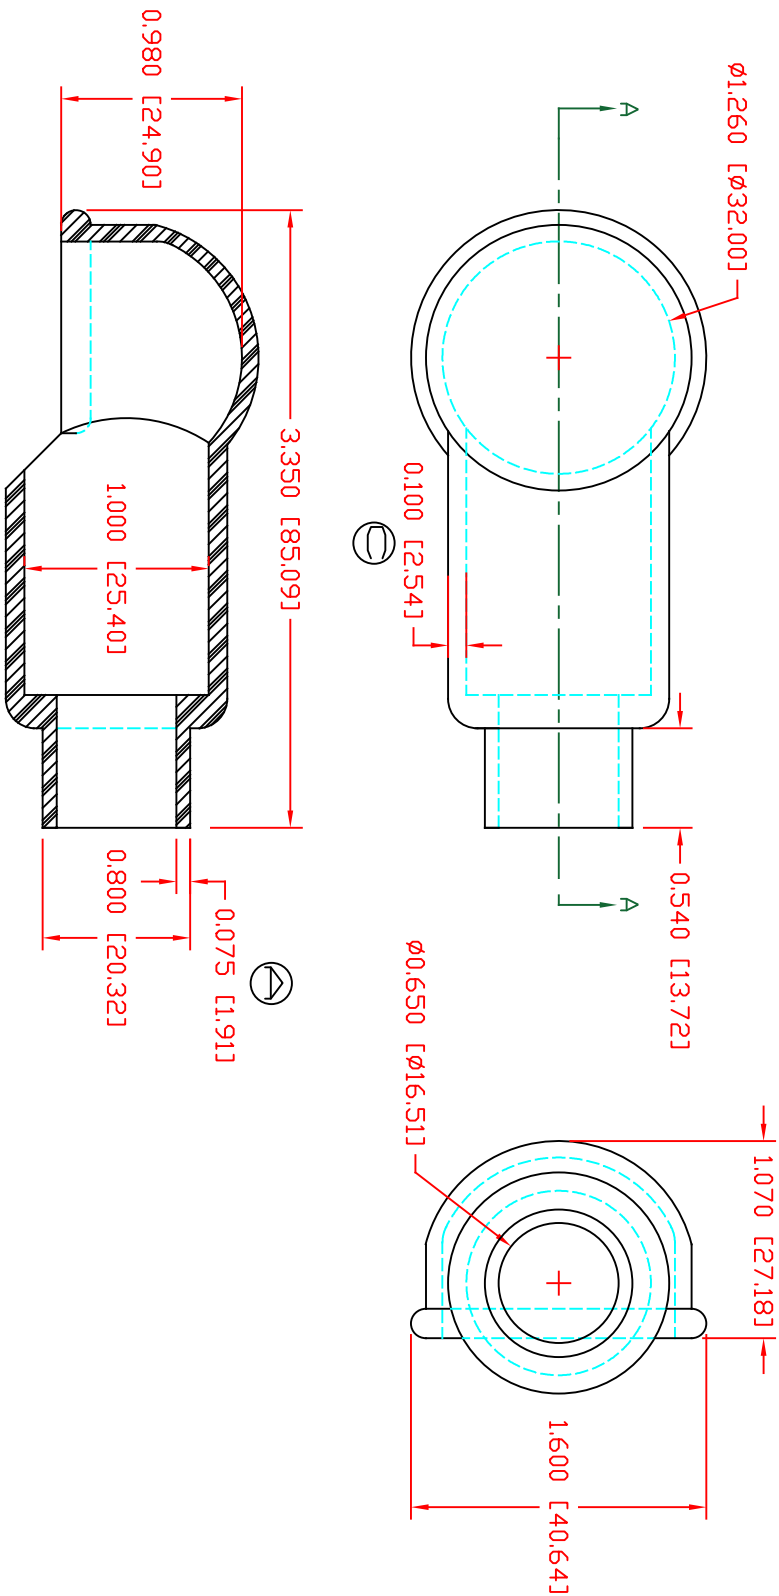

SECTION A-A

SCALE FACTOR : NONE
ALL DIMENSIONS GIVEN AS: in [mm]
TOLERANCES UNLESS OTHERWISE SPECIFIED :
MOLDED PARTS: ±0.30" [±0.8mm]
ALL ANGLES ARE ± 1 DEGREE



VTE Incorporated
5437 Robinson Road, P.O. Box 790
Pellston, Michigan 49769
Telephone: 1-800-527-9256, 231-539-8000
FAX: 231-539-0914

VTE MATERIAL PART NO: 1101650114
MATERIAL: BLACK PVC
MATERIAL PART NO: 9812-65
MAX OPERATING TEMPERATURE: 105 C
SHORE DUREMETER: "A" 10 SEC. 67/63
SPECIFIC GRAVITY: 1.33
ELONGATION %: 520
BRITTLENESS TEMPERATURE: -36 C
TENSILE STRENGTH, PSI: 1563 PSI

U.L. RATING:
MEETS:

94 V2
FMVSS.302

REF:	DATE:	DRN BY:	JC	WEIGHT:
	4-3-98	CHK'D BY:		058 LBS. / 26.4 G.
TITLE:	STARTER EYELET TERMINAL INSULATOR			
MATERIAL:	PVC	PART NO.		
COLOR:	BLACK	DRG	REV C	487N8V14