



THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF VTE INCORPORATED. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF VTE INCORPORATED IS PROHIBITED.

LTR.	REVISIONS	DATE	INT.
A	ADDED TORQUE SPECIFICATION	01-21-14	BRH
B	ADDED SUB-ASSEMBLY NOTE	02-23-15	BRH
C	REMOVED SUB-ASSEMBLY NOTE P/N 73886	02-04-16	RAS
D	REPLACED P/N 3842-002 WITH P/N 3842-005	03-29-16	RAS
E	UPDATED ELECTRICAL VALUES	01-03-17	RAS

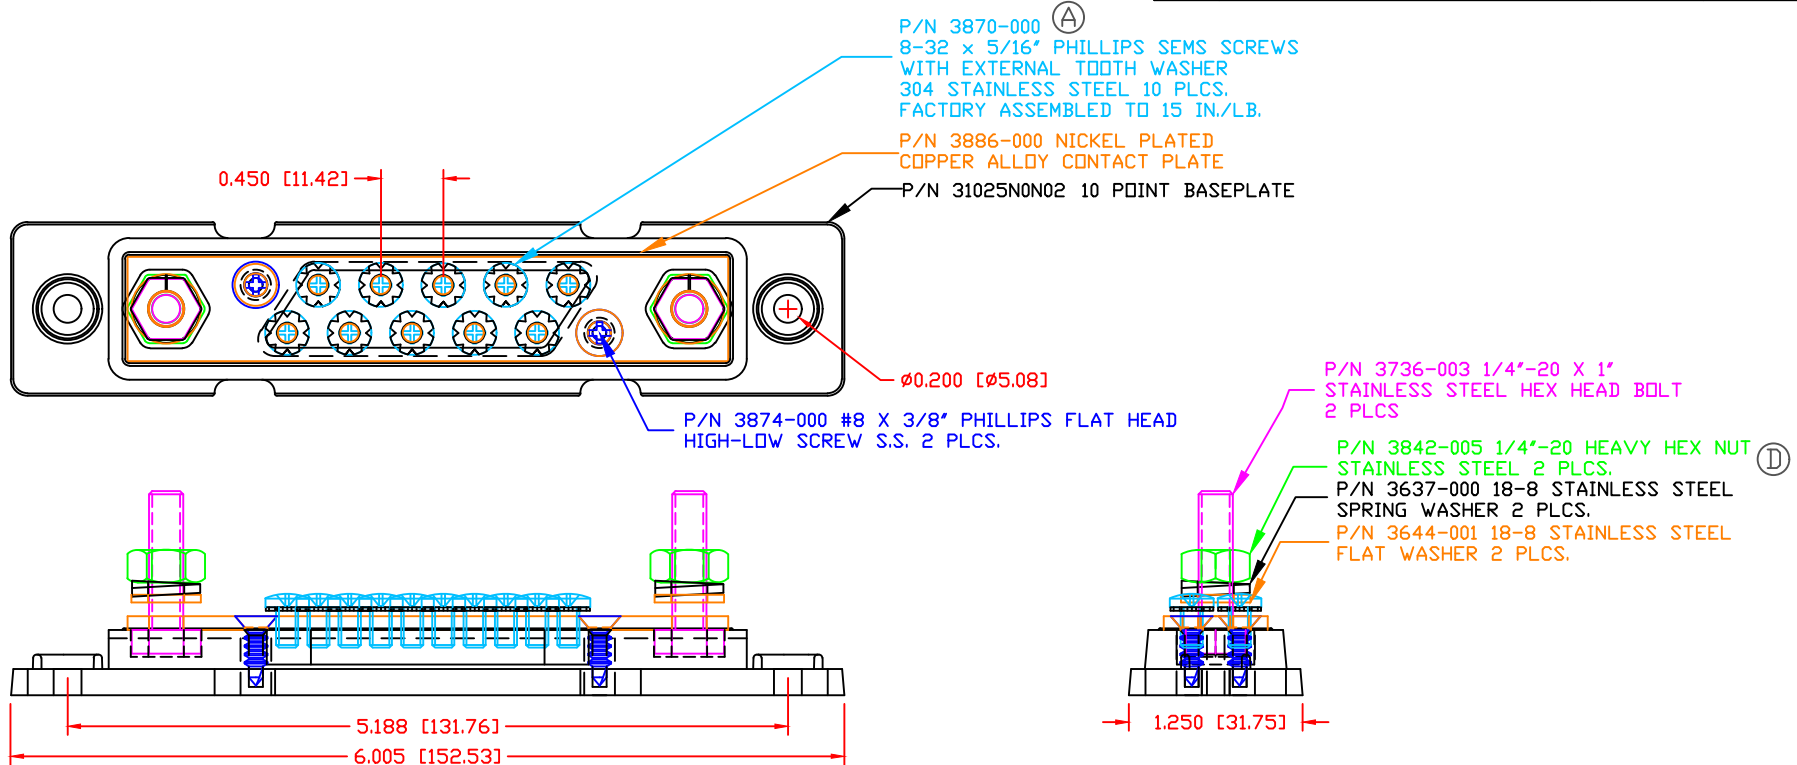

TOLERANCE UNLESS OTHERWISE SPECIFIED:
 MOLDED PRODUCTS ONLY: ±0.30°/±0.8mm
 HARDWARE ITEMS: ±0.010°/±0.25mm
 RADIAL DIAMETERS TO BE MEASURED OVER MANDRELS,
 RING GAGES OR PIN GAGES OF SUITABLE SIZE

#8 SCREWS FACTORY INSTALLED TO 15 IN-LBS
 MAXIMUM RECOMMENDED AMPERAGE: 150 A @12VDC (20A X 10 PLCS)
 MAXIMUM RECOMMENDED VOLTAGE: 48VDC
 BASE MATERIAL: GLASS-REINFORCED NYLON
 BASE MATERIAL U.L. RATING: 94 HB

		VTE Incorporated 5437 Robinson Road, P.O. Box 790 Pellston, Michigan 49769 Telephone: 1-800-527-9256, 231-539-8000 FAX: 231-539-0914	
		REF: CUSTOMER DIMS	DATE: 09-11-06
TITLE: 10 POINT BUS STRIP WITH 2-1/4" POSTS			SCALE:
MATERIAL:		PART NO.	
COLOR:	DRG CLASS	REV E	771025N0N02