


PROPRIETARY RIGHTS ARE CLAIMED FOR THE MATERIAL DISCLOSED IN THIS DRAWING.



LTR.	REVISIONS	DATE
✳	*****	00-00-98

SEAL OPTIONS  
SEAL THICKNESS = .8

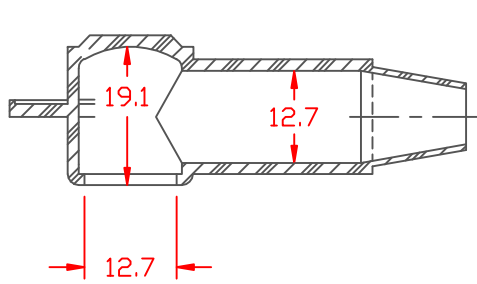


SECTION A-A

TYP. WALL THICKNESS = 1.5  
SEAL NO. 2 SHOWN





NO. 2  
Cable Gages  
8 - 2

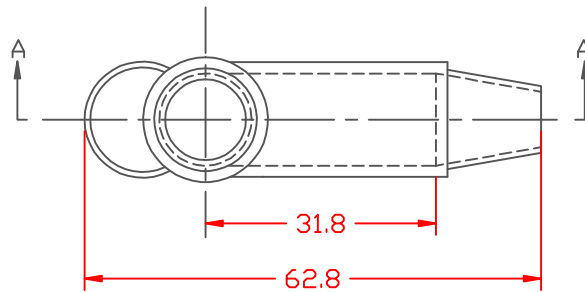

TOLERANCE UNLESS OTHERWISE SPECIFIED: ±.030"/±0.8mm  
RADIAL DIAMETERS TO BE MEASURED OVER MANDRELS,  
RING GAGES OR PIN GAGES OF SUITABLE SIZE

VTE Material Part No:	1101650102
Material:	RED PVC
Material Part No:	9812-65-RED683
Max. Operating Temp:	105 C
Shore Durometer:	"A" 10 SEC. 67/62
Specific Gravity:	1.34
Ult. Elongation %:	475
Brittle Temp:	-44 C
Tensile Strength PSI:	1547 PSI
Dielectric Strength, v./ml:	540
U.L. Rating:	94 V2
MEETS:	FMVSS.302



		<b>VTE Incorporated</b> 5437 Robinson Road, P.O. Box 790 Pellston, Michigan 49769 Telephone: 1-800-527-9256, 231-539-8000 FAX: 231-539-0914		
		REF:	DATE:	DRN BY: JC
		10-5-93	CHK'D BY:	.014 LBS. / 6.12 G.
TITLE: TERMINAL INSULATOR CAP				PART NO.
MATERIAL:		214E2V02		
COLOR:	DRG CLASS			