




PROPRIETARY RIGHTS ARE CLAIMED FOR THE MATERIAL DISCLOSED IN THIS DRAWING.

TYP. WALL THICKNESS = 1.8


LTR.	REVISIONS	DATE
✂	*****	00-00-98

SEAL OPTIONS


SEAL THICKNESS = .8

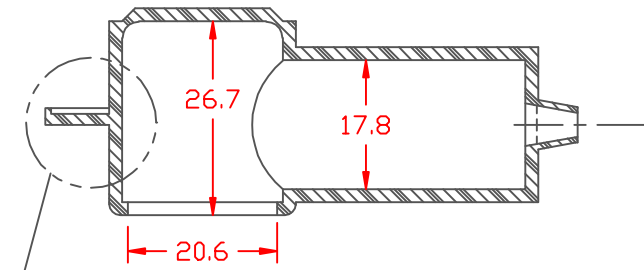



NO. 1  
Wire Gages  
18 - 10



NO. 2  
Cable Gages  
8 - 2





NO. 3  
Cable Gages  
2 - 2/0

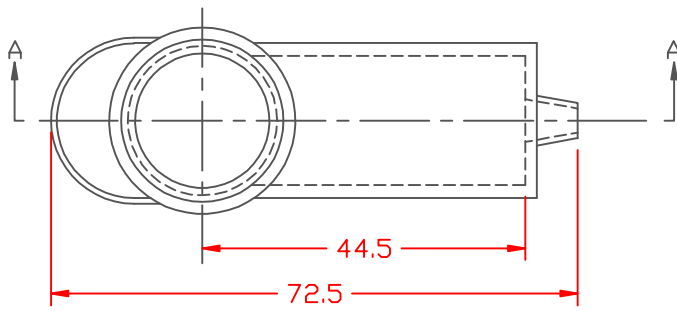

TOLERANCE UNLESS OTHERWISE SPECIFIED: ±.030"/±0.8mm  
RADIAL DIAMETERS TO BE MEASURED OVER MANDRELS,  
RING GAGES OR PIN GAGES OF SUITABLE SIZE

VTE Material Part No:	1101650102
Material:	RED PVC
Material Part No	9812-65-RED683
Max. Operating Temp:	105 C
Shore Durometer	"A" 10 SEC. 67/62
Specific Gravity:	1.34
Ult. Elongation %:	475
Brittle Temp:	-44 C
Tensile Strength PSI:	1547 PSI
Dielectric Strength, v./ml	540
U.L. Rating:	94 V2
MEETS:	FMVSS.302





**VTE Incorporated**  
5437 Robinson Road, P.O. Box 790  
Pellston, Michigan 49769  
Telephone: 1-800-527-9256, 231-539-8000  
FAX: 231-539-0914

REF:	DATE: 3-24-98	DRN BY: JC CHK'D BY:	WEIGHT: .025 LBS. / 11.5 G.
TITLE: TERMINAL INSULATOR CAP			PART NO. <b>222E1V02</b>
MATERIAL:	DRG CLASS		