
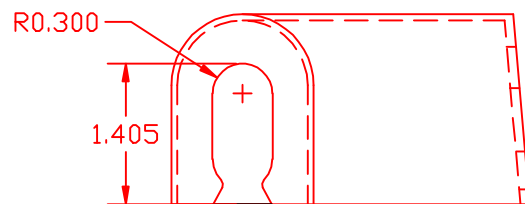
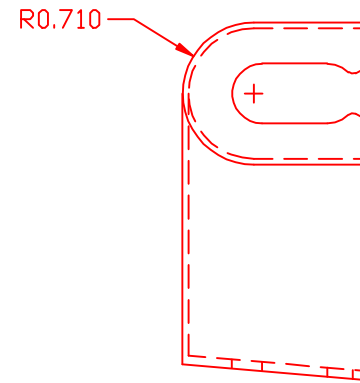


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF VTE INCORPORATED. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF VTE INCORPORATED IS PROHIBITED.

LTR.	REVISIONS	DATE
✂	*****	00-000-00

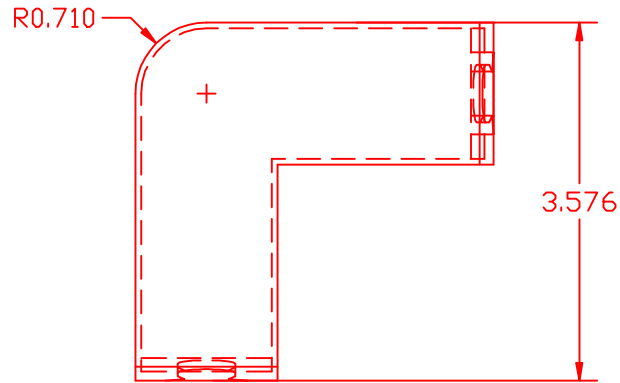

DO NOT SCALE

TOLERANCE UNLESS OTHERWISE SPECIFIED:
 MOLDED PRODUCTS ONLY: ±.030"/±0.8mm
 HARDWARE ITEMS: ±0.010"/±0.25mm
 RADIAL DIAMETERS TO BE MEASURED OVER MANDRELS,
 RING GAGES OR PIN GAGES OF SUITABLE SIZE

Material:
 Material Part No
 Max. Operating Temp:
 Durometer:
 Specific Gravity:
 Ult. Elongation %:
 Modulus PSI:
 Tensile Strength PSI:
 Dielectric Strength, v./ml
 MEETS:

Polypropylene
 Polypropylene Copolymer
 550 F
 110 R-Scale
 1.13
 2.5
 Not Tested
 9500
 Not Tested
 UL94HB



VTE Incorporated
 5437 Robinson Road, P.O. Box 790
 Pellston, Michigan 49769
 Telephone: 1-800-527-9256, 231-539-8000
 FAX: 231-539-0914

REF:	DATE:	DRN BY: BRH	WEIGHT:
***	12MAY06	CHK'D BY: BRH	***
TITLE: 2 CABLE TERMINAL INSULATOR			SCALE:
MATERIAL:		PART NO.	
COLOR: ***	DRG CLASS: ***	375L5 P02	