THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF VTE INCORPORATED. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF VTE INCORPORATED IS PROHIBITED.

LTR.	REVISIONS	DATE	INT.
A	3842-000 WAS 3842	04APR06	BRH
B	ADDED COMPONENT P/N SUFFIXES	04-04-06	BRH
C	3842-003 WAS 3842-000	10-10-06	BRH
D	ADDED SUB ASSEMBLY P/N 37875	10-11-06	BRH
E	REMOVED SUB-ASSEMBLY NOTE P/N 37875	02-02-16	RAS
F	PN 329N0V** CHANGED TO PN 329N0N**	06-27-16	MDL

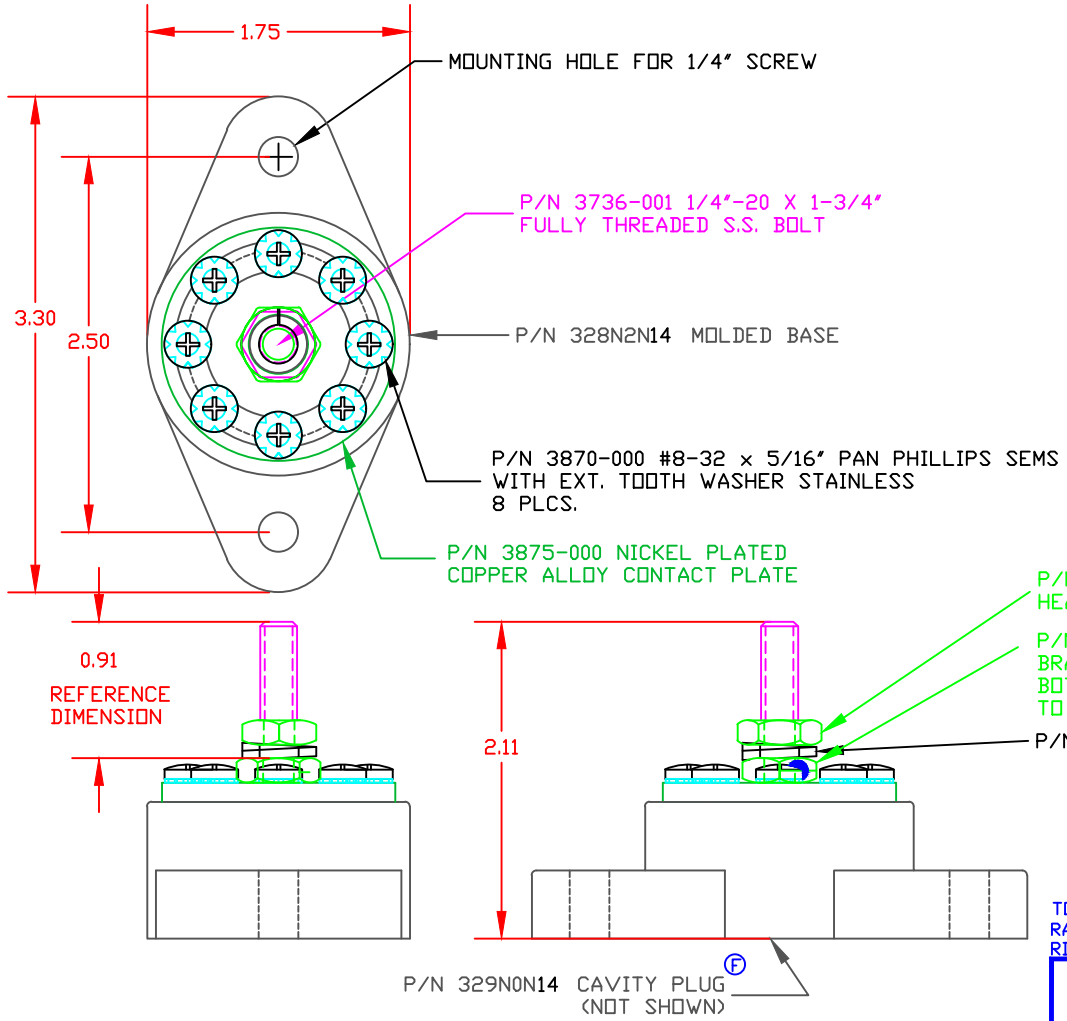

DO NOT SCALE

P/N 3842-003 1/4"-20 S.S. HEAVY JAM NUT

P/N 3842-001 1/4"-20 TIN-PLATED BRASS HEAVY HEX JAM NUT BOTTOM NUT FACTORY INSTALLED TO 72 IN./LBS.

P/N 3637-000 S.S. SPRING LOCK WASHER

TOLERANCE UNLESS OTHERWISE SPECIFIED: ±.030"/±0.8mm
RADIAL DIAMETERS TO BE MEASURED OVER MANDRELS, RING GAGES OR PIN GAGES OF SUITABLE SIZE

INCLUDES P-16808110001 BLUE DOT MULTI LABEL, 1 PER CONTAINER

RECOMMENDED MAX TORQUE:	1/4"-20 60 IN./LBS.
	SCREWS 15 IN./LBS.
CURRENT RATING:	160 AMPS @ 12 VDC
VOLTAGE RATING:	48 VDC MAX.
TEMP. RISE AT LOAD:	52 DEG. F.
BASE MATERIAL:	GLASS-REINFORCED NYLON
BASE MATERIAL U.L. RATING:	94 HB
DIELECTRIC STRENGTH:	630 VOLTS/MIL

VTE Incorporated
5437 Robinson Road, P.O. Box 790
Pellston, Michigan 49769
Telephone: 1-800-527-9256, 231-539-8000
FAX: 231-539-0914

REF: CUSTOMER DIMS	DATE: 04-09-03	DRN BY: BRH / CHK'D BY: BRH	WEIGHT:
TITLE: 1/4" POWER DISTRIBUTION POST			SCALE:
MATERIAL:		PART NO. 77825N14	
COLOR:	DRG CLASS REV F		