

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF VTE INCORPORATED. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF VTE INCORPORATED IS PROHIBITED. VTE MAKES NO WARRANTY, EXPRESSED OR IMPLIED, AS TO THE SUITABILITY OF A PRODUCT FOR ANY INTENDED USE. THE CUSTOMER SHALL BEAR THE SOLE RESPONSIBILITY OF DETERMINING THE SUITABILITY OF ANY VTE PRODUCT FOR ITS END USE.

	LTR.	REVISI□NS	DATE	INT.
I	$\triangle$	ADDED (REFERENCE DNLY) TO OVERALL LENGTH DIMENSION	12-18-17	RAS
Ī	$\mathbb{B}$	UPDATED MATERIAL INFORMATION	8-02-22	RAS

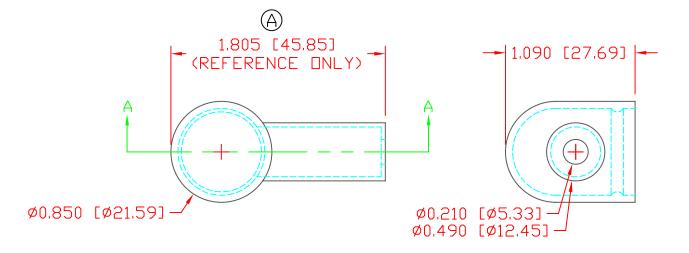

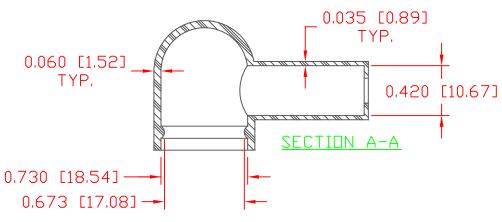

MATERIAL PART ND:
MATERIAL:
VENDOR PART ND:
SHORE DUROMETER:
SPECIFIC GRAVITY:
ULT. ELONGATION %:
MELTING TEMP:
BRITTLE TEMP:
TENSILE STRENGTH PSI:
DIELECTRIC STRENGTH, V./mil
U.L. RATING:

 $\bigcirc$ 

1101650114 PVC 9812-65-BLACK "A" 10 SEC. 65 1.34 400 315-335 F [157-168 C] -54 F [-48 C] 1550 PSI 453 V2 SCALE FACTOR : NONE
ALL DIMENSIONS GIVEN AS: in [mm]
TOLORANCES UNLESS OTHERWISE SPECIFIED :
MOLDED PARTS: ±.030" [±0.8mm]
ALL ANGLES ARE ± 1 DEGREE



VTE Incorporated
5437 Robinson Road, P.D. Box 790

Pellston, Michigan 49769 Telephone: 1-800-527-9256, 231-539-8000 FAX: 231-539-0914

REF: DATE: DRN BY: JC WEIGHT: CUSTOMER DIMS 4-8-98 CHK'D BY: .012 LBS. / 5.49 G.

MATERIAL: PVC PART ND.

COLOR: BLACK DRG CLASS REV B 800N5V14